

# M5

Series	707
Contacts	3, 4
Thread	M5 x 0,5
Rated current	1 A
Rated voltage	60 V
Degree of protection	IP67
Contact plating	Au
Termination	moulded
Shielding	shield on housing
Cable	PUR, 3 and 4 x 0,14 mm <sup>2</sup>



## M5 Shielded and Overmoulded Cable Connectors


- 360 degrees shielding
- Non-disrupted data transfer due to screening attenuation values from 60 dB in the 1 GHz range
- Further fields of application are sensor technology, materials handling or storage techniques
- 3 and 4 pole versions are intermateable
- Can be configured on customer's request
- Available from July 2016 on

### Description

Male cable connector, moulded, M5 x 0,5, shielded




### Drawing

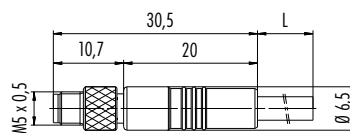

### Contacts Cable length, PUR Ordering-No.

3	2 m	79 3121 52 03
	5 m	79 3121 525 03
4	2 m	79 3127 52 04
	5 m	79 3127 525 04

Female cable connector, moulded, M5 x 0,5, shielded



3	2 m	79 3122 52 03
	5 m	79 3122 525 03
4	2 m	79 3128 52 04
	5 m	79 3128 525 04