

Product description **Snap-In IP40 female cable connector, Contacts: 5, 3.5 - 5.0 mm, Shielding is not possible, solder, IP40**  
 Area **Snap-In IP40 series 719**  
 Order number **09 9790 71 05**

Illustration	Scale drawing	Contact arrangement																		
		<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-0,88</td> <td>-1,21</td> </tr> <tr> <td>2</td> <td>-1,42</td> <td>0,46</td> </tr> <tr> <td>3</td> <td>0,00</td> <td>1,49</td> </tr> <tr> <td>4</td> <td>1,42</td> <td>0,46</td> </tr> <tr> <td>5</td> <td>0,88</td> <td>-1,21</td> </tr> </tbody> </table>		X	Y	1	-0,88	-1,21	2	-1,42	0,46	3	0,00	1,49	4	1,42	0,46	5	0,88	-1,21
	X	Y																		
1	-0,88	-1,21																		
2	-1,42	0,46																		
3	0,00	1,49																		
4	1,42	0,46																		
5	0,88	-1,21																		

You can find the component part drawing on the next page.

## Technical data

### General values

Connector design	female cable connector
Connector locking system	snap
Termination	solder
Wire gauge (mm)	0.25 mm <sup>2</sup>
Wire gauge (AWG)	24
Cable outlet	3.5 - 5.0 mm
Upper limit temperature	70 °C
Lower limit temperature	- 25 °C
Customs tariff number	85369010

### Electrical values

Rated current (40 °C)	3 A
Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	1
Overvoltage category	II
Insulating material group	III
Insulation resistance	≥ 10 <sup>10</sup> Ω
EMC compliance	Shielding is not possible
Degree of protection	IP40
Mechanical operation	> 100 Mating cycles


### Material

Contact material	CuSn (bronze)
Contact plating	Au (gold)
Contact body material	PA
Housing material	PA

Product description **Snap-In IP40 female cable connector, Contacts: 5, 3.5 - 5.0 mm, Shielding is not possible, solder, IP40**

Area **Snap-In IP40 series 719**  
Order number **09 9790 71 05**

### Component part drawing

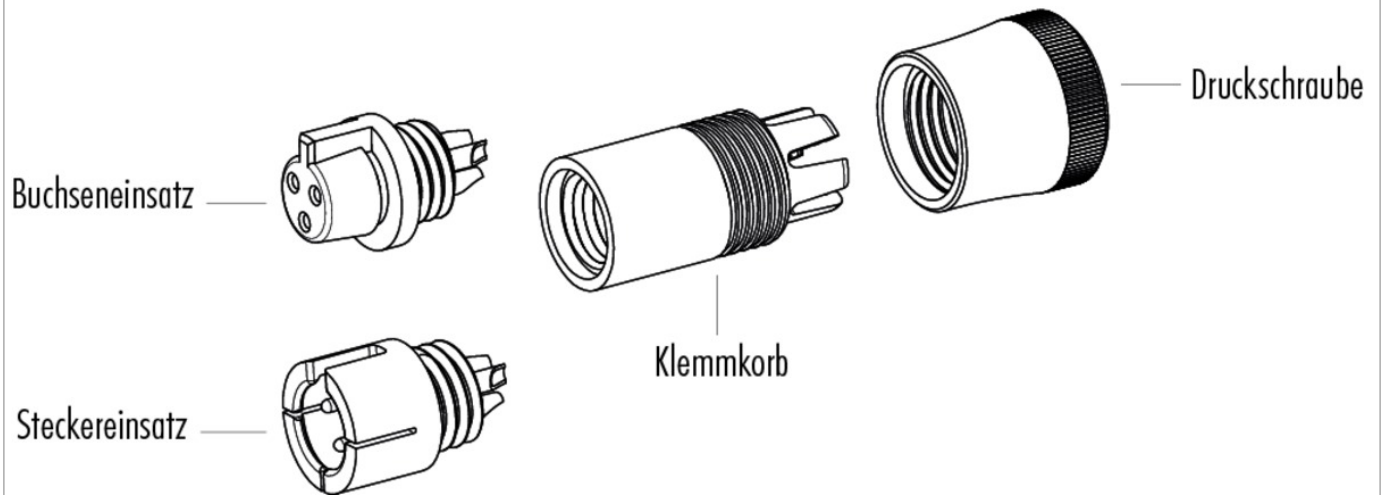

Product description	<b>Snap-In IP40 female cable connector, Contacts: 5, 3.5 - 5.0 mm, Shielding is not possible, solder, IP40</b>
Area	<b>Snap-In IP40 series 719</b>
Order number	<b>09 9790 71 05</b>

## Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.