


Product description **Contacts: 8, female cable connector IP 67, shielded**

Area **Push-Pull IP67 Series 430**
Order number **99 4930 00 08**


Illustration



Scale drawing

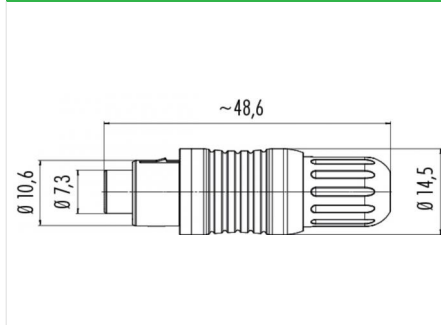

Contact arrangement

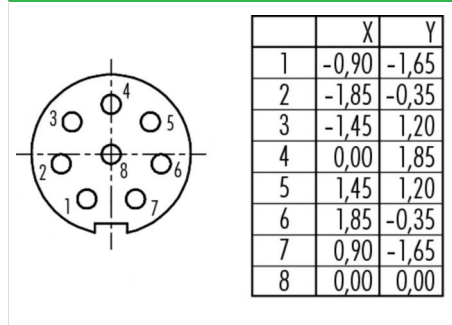

You can find the component part drawing on the next page.

Technical data

General values

| | |
|--------------------------|----------------------|
| Connector design | Kabeldose |
| Connector locking system | Push-Pull |
| Termination | löten |
| Wire gauge (mm) | 0,14 mm ² |
| Wire gauge (AWG) | 26 |
| Cable outlet | 3,5 – 5 mm |
| Upper limit temperature | 85 °C |
| Lower limit temperature | -40 °C |

Electrical values

| | |
|---------------------------|-------------------|
| Rated voltage | 125 V |
| Rated impulse voltage | 1500 V |
| Pollution degree | 2 |
| Overvoltage category | I |
| Insulating material group | II |
| Rated current (40 °C) | 1 A |
| Volume resistivity | ≤ 5 mΩ |
| EMC compliance | schirmbar |
| Degree of protection | IP67 |
| Mechanical operation | > 500 Steckzyklen |


Material

| | |
|-----------------------|---------------|
| Contact material | CuSn (Bronze) |
| Contact plating | Au (Gold) |
| Contact body material | PBT, PA |

Product description **Contacts: 8, female cable connector IP 67, shielded**

Area **Push-Pull IP67 Series 430**
Order number **99 4930 00 08**

Component part drawing

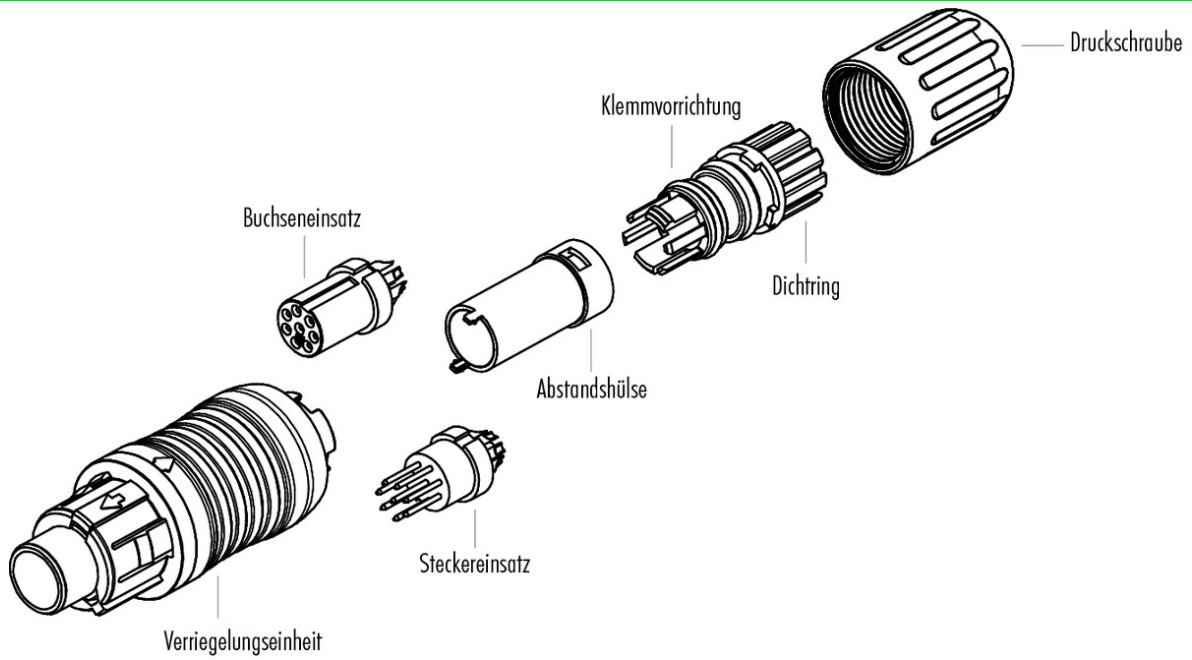

Product description **Contacts: 8, female cable connector IP 67, shielded**

Area **Push-Pull IP67 Series 430**
Order number **99 4930 00 08**

Sicherheitshinweise

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.